

# NX-N100

Intel® Alder Lake N series Processor based Ultra Compact Fanless Mini PC with 2HDMI2.0 plus DP1.4(USB-C)



## Features

- CPU: Intel® Alder Lake N series Processor
- Memory: Single Channel SO-DIMM DDR4 up to 32GB
- Display: Integrated Graphics display via 2xHDMI2.0 plus DP1.4(USB-C)
- I/O Ports: 2xLAN, 3xUSB3.2, 1xUSB2.0, USB-C, SIM, COM optional
- Ethernet: 10/100/1000/2500Mbps
- Storage: 1x M.2 2280 SATA/4G, 1xSATA(FPC)
- Power: 12V DC-in



IoT Solutions  
Alliance

Industrial Solution  
Builders Specialist

**Maxtang**<sup>®</sup>

MAXIMIZING YOUR COMPUTING PRODUCTIVITY

## Introduction

The Maxtang's NX-N100 ultra-compact fanless mini-PC incorporated the Intel Alder Lake-N series processor, offering you greater computing power with cost advantages. Supports Single-channel SO-DIMM DDR4 up to 32GB, multiple displays via 2xHDMI2.0 plus USB-C DisplayPort 1.4 Alt Mode. A rich i/o interface includes 2xLAN, 3xUSB3.2, and 1xUSB2.0 to meet most market requirements. It provides an excellent customer experience and a long-lasting life expectancy for future development.

Based on small form factors, the compact design at 127mm x 127mm x 45.6mm makes it great for space-saving. The NX-N100 has 1xM.2 for storage or a 4G module, 1x FPC SATA interface with built-in Wi-Fi&Bluetooth, SIM slot for expansion. Desktop ready for easy installation. With advanced cooling construction and a compact, fanless design it can overcome noise challenges. Its comprehensive connectivity makes it suitable for kiosks, PoS, retail, or other IoT application uses.



H/W Monitor



Watchdog

## I/O Interfaces




## Technical Specifications

Processor	CPU	N100
	Total Cores/Threads	4C/4T
	Max Turbo Frequency	3.40GHz
	Cache	6MB Intel® Smart Cache
	TDP	6W
Memory	Type	Single Channel SO-DIMM DDR4
	Max. Capacity	32GB
Display	GPU	Integrated Intel® UHD Graphics
	Display Interface	2xHDMI2.0 plus DisplayPort 1.4 through USB-C
Ethernet	Speed	10/100/1000/2500 Mbps
	Controller	RTL8125
	Interface	2x RJ45
	Wake on LAN	Yes
Audio	Audio Codec	Realtek HD
	Interface	1xCTIA 2-in-1 Audio Jack, supports Mic-in+Line-out
Storage	M.2	1xM.2 for 2280 SATA/4G
	SATA	1x FPC SATA interface
Expansion	M.2	1xM.2 for WiFi, supports PCIe, USB&CNVi
	SIM	1
Other I/O	EMMC	optional
	COM	RS232 optional
	USB2.0	1
	USB3.2	3
	Type-C	1xUSB-C
		Support USB 3.2 Gen 2 upstream/DisplayPort 1.4 Alt Mode
	Wired Control	Optional
	TPM	Optional
Dimension	Size	127mm x 127mm x 45.6mm
Weight	N.W.	TBD
Power	Standard Port	12V DC-in
Temperature	Operating Temp.	- 20°C to 60°C
	Storage Temp.	- 40°C to 80°C
Cooling Method		Passive
Operating System		Windows 10/11 64bit, Linux 64bit

\* All specifications and photos are subject to change without notice.

Dimension (in mm)

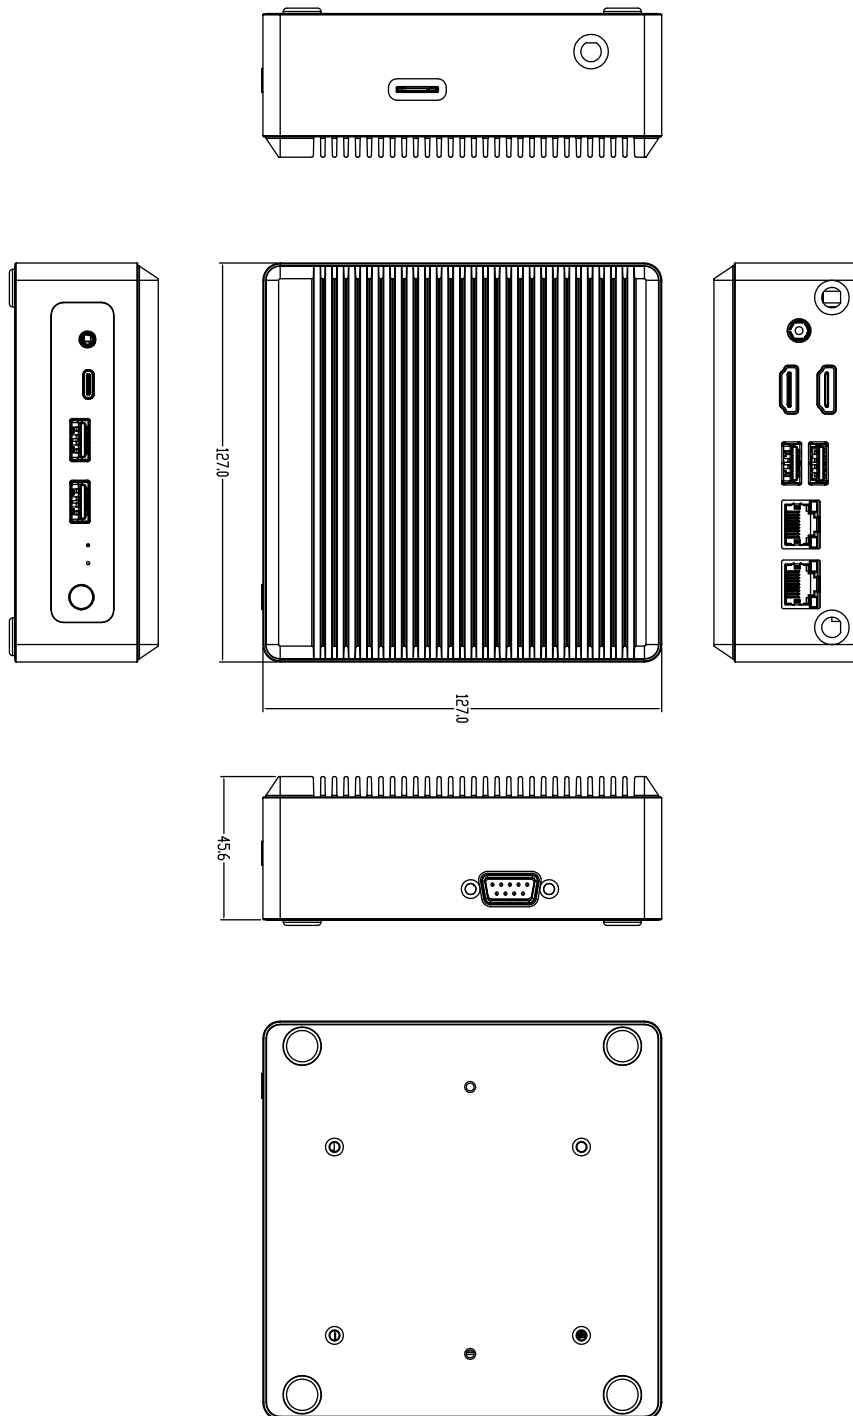

Copyright © 2023 Maxtang Technology Co. Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized.