

VHEHL-30

Intel Elkhart Lake J6412 Processor based Fanless
Mini PC with 3HDMI2.0 for Display



Features

- CPU: Intel Elkhart Lake J6412 Processor
- Memory: Dual Channel SO-DIMM DDR4 up to 32GB
- Display via: Intel Integrated Graphics display via 3xHDMI2.0
- I/O Ports: 2xLAN, 1xCOM, 2xUSB3.2, 4xUSB2.0, Type-C, SIM
- Ethernet: 10/100/1000Mbps
- Storage: 2xM.2 for SSD
- Power: 12V DC-in/16V~30V Optional



IoT Solutions
Alliance

Industrial Solution
Builders Specialist

Maxtang[®]

MAXIMIZING YOUR COMPUTING PRODUCTIVITY

Introduction

Maxtang's VHEHL-30 embedded mini-PC incorporated the Intel Elkhart Lake processors, offering you greater computing power with cost advantages. Dual-channel SO-DIMM DDR4 up to 32GB for its memory, multiple displays via 3xHDMI2.0. A rich i/o interface includes 2xLAN, 2xUSB3.2, and 4xUSB2.0, and 1xCOM meets most market's requirements. It provides an excellent customer experience, a long-lasting life expectancy for future development.

It bases on a small form factor which is great for space-saving. This PC supports VESA mounting, 2xM.2 for storage, additional M.2 for Wi-Fi, and SIM slot for expansion, and is desktop ready for easy installation. It builds with advanced cooling construction, overcomes noise challenges, and can be a great fit for various applications.



H/W Monitor



Watchdog

I/O Interfaces




Technical Specifications

Processor	CPU	J6412
	Base Frequency	2.00GHz
	Burst Frequency	2.60GHz
	Cache	1.5MB L2
	TDP	10W
Memory	Type	Dual Channel SO-DIMM DDR4
	Max. Capacity	32GB
Display	GPU	Intel® UHD Graphics for 10th Gen Intel® Processors
	Display via	HDMI2.0
Ethernet	Speed	10/100/1000 Mbps
	Controller	RTL8111H
	Interface	RJ45
	Wake on LAN	Yes
Audio	Audio Codec	Realtek HD
	Interface	1x Line-out+1x Mic-in
Storage	M.2	1xM.2 for 2280 NVMe SSD (PCIe 2X signal)
	M.2	1xM.2 for 2242/2280 SATA SSD or 4G
Expansion	M.2	1x M.2 for WiFi
	SIM	1
I/O	LAN	2
	COM	1x RS232 Default, COM1 RS422/485 Optional
	USB2.0	4
	USB3.2	2
	Type-C	1
	HDMI2.0	3
	TPM	Onboard, optional
	Size	191 mm x 151mm x 34 mm
Dimension		
Weight	N.W.	TBD
Power	Standard Port	12V DC-in /16V~30V optional
Temperature	Operating Temp.	- 20°C to 60°C
	Storage Temp.	- 40°C to 80°C
Cooling Method		Passive
Operating System		Windows 10/11 64bit, Linux 64bit

* All specifications and photos are subject to change without notice.

Dimension (in mm)

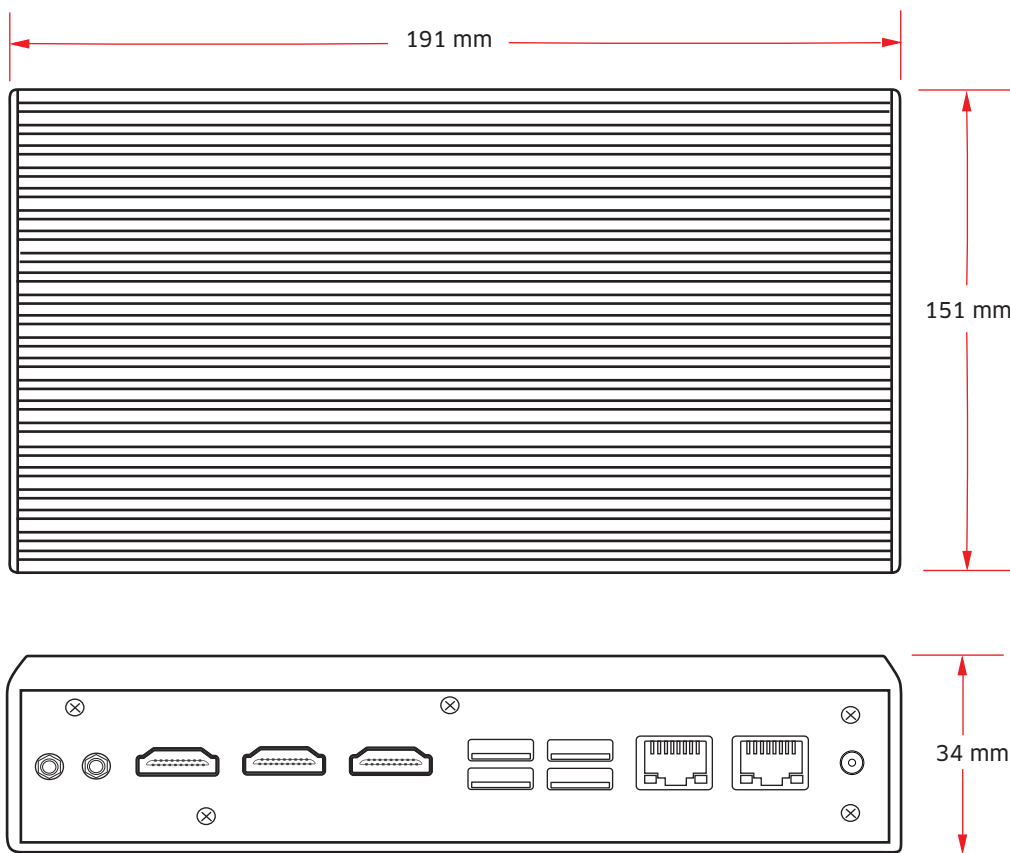

Copyright © 2023 Maxtang Technology Co., Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress, and HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.